



POLICE DEPARTMENT
 LAKE HAVASU CITY
 2360 McCULLOCH BOULEVARD NORTH
 LAKE HAVASU CITY, ARIZONA 86403-5947

To Whom It May Concern:

I hereby attest that Louis H. Plunkett III is a certified Intoxilyzer Quality Assurance Specialist for the Lake Havasu City Police Department.

I certify that the attached documentation of Standard Quality Assurance Procedures and/or Standard Calibration Check Procedures are a full, true, and correct copy of the original.



 Signature

STATE OF ARIZONA)
) ss
 COUNTY OF MOHAVE)


Subscribed and sworn to before me this 12 day of November, 2018

by Louis Plunkett

Rebecca Dutton Rebecca Arto
 NOTARY PUBLIC

11/12/18
 DATE

Commission expires: 9/20/19

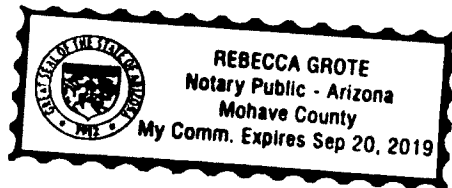

Area Code 928

Administration	855-4884	Fax #'s		Emergency	9-1-1
Business Office	855-1171	Administration	680-5430	Non-Emergency Dispatch/	855-4111
Investigations	855-5775	Business Office	680-5431	Havasu Silent Witness	854-TIPS
Patrol	855-0515	Investigations/Patrol	680-5432		

E-mail: police@lhcaz.gov

Exhibit G-2. Standard Calibration Check Procedure, Intoxilyzer Model 8000

THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104(A)
ARIZONA DEPARTMENT OF PUBLIC SAFETY
STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 8000
STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST LOUIS H. PLUNKETT, III AGENCY LACPD
DATE 11-12-18 TIME 0926
INTOXILYZER SERIAL # 80-003366 LOCATION LACPD

- 1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution 100 AC.
OR
Pour a standard alcohol concentration solution AC. into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach 34° C ± 0.2° C
- 2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
- 3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
- 4. Air blank completed.
- 5. Calibration check completed. Test results 0. 0.091 AC.
- 6. Air blank completed.
- 7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE [Signature] 263

DPS Form Exh G-2 (Rev 05-01)

Historical Note
New Exhibit G-2 made by final rulemaking at 12 A.A.R. 1916, effective 9:00 a.m., May 18, 2006 (Supp. 06-2).

INSTRUMENT 800
LABORATORY: MATH 441
Serial Number: 80-010088
Date Version: 8.05.48
11/10/2018 09:06:09

Standard Lot: 109.7104
Last Changed By: J. SOMERS, JYB

Operator: J. PLUMETT (11) 4850
LAB: H4046, 017, 80

Operator: J. PLUMETT (11) 4850
LAB: H4046, 017, 80

Test	g/g	Time
Fit Blank	0.000	09:26:36
1.00000 Check	0.000	09:26:59
Fit Blank	0.000	09:27:09

Preventative Maintenance
Performed -- Timer Reset

Exhibit G-4. Standard Quality Assurance Procedure Intoxilyzer, Model 8000

THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104(A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY
STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 8000
STANDARD QUALITY ASSURANCE PROCEDURE

QA SPECIALIST LOUIS H. PHUJETT III AGENCY WACPD

DATE 11-12-18 TIME 0931

INTOXILYZER SERIAL # 80-003356 LOCATION WACPD

(X) 1. Display Reads "PUSH BUTTON TO START"

DIAGNOSTIC TESTS

- (X) 1. Clock time check.
- (X) 2. Date check.

OPERATIONAL TESTS

- (X) 1. Alcohol-free subject test result 0. 000 AC.
- (X) 2. Error recognition logic system functioning.
Not a Successfully Completed Test Sequence printed
- (X) 3. Proper sample recognition system.
Not a Successfully Completed Test Sequence printed
Deficient sample printed.
- (X) 4. Standard Calibration Check standard 0. 100 AC. Result 0. 101 AC.

Instrument is operating properly and accurately. YES X NO

COMMENTS PLACED OUT OF SERVICE AFTER WET WORKSHOP ON 11-02-18.

AMBIENT FAIL ON SECOND G-2.

SIGNATURE [Signature] 253

DPS Form Exh G-4 (Rev 05-01)

Historical Note

New Exhibit G-4 made by final rulemaking at 12 A.A.R. 1916, effective 9:00 a.m., May 18, 2006 (Supp. 06-2).

170X1012EP100
 170X1012EP100
 Serial Number: 81002056
 Date Version: 8105-46
 1701018 09:30:45

Standard Lot#: 13970094
 Last Changed By: 01-30ND90LH-87

246-11-RUKETT-111-A250
 LANE-HA-461-117-40

Operator: 11-RUKETT-111-A250
 LANE-HA-461-117-40

Subject: SPFF TEST
 DOB: 01/01/2000
 Sex: M Weight: 200

15 Minute Deprivation Period: Pass

Test	Result	Time
Air Blank	0.000	09:30:46
Diagnostic Test	Pass	09:30:50
Air Blank	0.000	09:30:53
0.100 Cal Check	0.099	09:30:54
Air Blank	0.000	09:30:54
Subject Test	0.000	09:35:44
Air Blank	457*	09:35:50
Air Blank	1P5**	09:35:59

*Sequence Aborted
 **Inproper Sample

Not a Successfully
 Completed
 Test Sequence

170X1012EP100
 170X1012EP100
 Serial Number: 81002056
 Date Version: 8105-46
 1701018 09:30:56

Standard Lot#: 13970094
 Last Changed By: 01-30ND90LH-87

246-11-RUKETT-111-A250
 LANE-HA-461-117-40

Operator: 11-RUKETT-111-A250
 LANE-HA-461-117-40

Subject: SPFF TEST
 DOB: 01/01/2000
 Sex: M Weight: 200

15 Minute Deprivation Period: Pass

Test	Result	Time
Air Blank	0.000	09:30:46
Diagnostic Test	Pass	09:30:50
Air Blank	0.000	09:30:53
0.100 Cal Check	0.000	09:30:54
Air Blank	0.000	09:30:54
Subject Test	0.054*	09:40:49
Air Blank	0.000	09:40:51
Air Blank	0.000	09:43:49
Subject Test	**X**	09:44:12
Air Blank	RF***	09:44:20

*Deficient Sample
 **Invalid Sample
 Begin new deprivation period
 ***RF Detect

Not a Successfully
 Completed
 Test Sequence

Exhibit G-2. Standard Calibration Check Procedure. Intoxilyzer Model 8000

THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104(A)
ARIZONA DEPARTMENT OF PUBLIC SAFETY
STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 8000
STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST LOUIS H. PLUNKETT III AGENCY LHCPD

DATE 11-12-18 TIME 0948

INTOXILYZER SERIAL # 80-003356 LOCATION LHCPD

- (X) 1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution 100 AC.
OR
Pour a standard alcohol concentration solution _____ AC. into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach 34° C ± 0.2° C
- (X) 2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
- (X) 3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
- (X) 4. Air blank completed.
- (X) 5. Calibration check completed. Test results 0. 098 AC.
- (X) 6. Air blank completed.
- (X) 7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE [Signature]

DPS Form Exh G-2 (Rev 05-01)

Historical Note
New Exhibit G-2 made by final rulemaking at 12 A.A.R. 1916, effective 9:00 a.m., May 18, 2006 (Supp. 06-2).

INTOXILYZER 8000
Location: MAIN JAIL
Serial Number: 80-003356
Core Version: 8105.48
11/12/2018 09:46:43

Standard Lot#: 13917100A1
Last Changed By: J. SONDROL #187

DAS: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Operator: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Test	g/210L	Time
Air Blank	AMB*	09:47:15
Air Blank	0.003	09:47:44

*Ambient Fail

INTOXILYZER 8000
Location: MAIN JAIL
Serial Number: 80-003356
Core Version: 8105.48
11/12/2018 09:48:01

Standard Lot#: 13917100A1
Last Changed By: J. SONDROL #187

DAS: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Operator: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Test	g/210L	Time
Air Blank	0.000	09:48:33
0.100 Cal Check	0.098	09:48:54
Air Blank	0.000	09:49:24

Preventative Maintenance
Performed -- Timer Reset