



POLICE DEPARTMENT

LAKE HAVASU CITY
2360 McCULLOCH BOULEVARD NORTH
LAKE HAVASU CITY, ARIZONA 86403-5947

To Whom It May Concern:

I hereby attest that Louis H. Plunkett III is a Certified Intoxilyzer Quality Assurance Specialist for the Lake Havasu City Police Department.

I certify that the attached documentation of Standard Quality Assurance Procedures and/or Standard Calibration Check Procedure are full, true and correct copy of the original.

[Signature]
Signature

STATE OF ARIZONA)
) ss
COUNTY OF MOHAVE)


Subscribed and sworn to before me this 23 day of August

2017 by Louis Plunkett III

Rebecca Dethlefs Rebecca Grotte
NOTARY PUBLIC

8/23/17
DATE

Commission expires

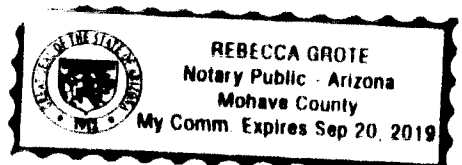

Area Code 928

Administration	855-4884	Fax #s		Emergency	9-1-1
Business Office	855-1171	Administration	680-5430	Non-Emergency Dispatch	855-4111
Investigations	855-5775	Business Office	680-5431	Havasu Silent Witness	854-1125
Patrol	855-0515	Investigations/Patrol	680-5432		

EXHIBIT G-2
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY
STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 8000
STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST LOUIS H. PHUNYETT III AGENCY LHCPD

DATE 08/23/17 TIME 1754

INTOXILYZER SERIAL # 80-003356 LOCATION LHCPD JAIL

1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution 100 AC.
OR
Pour a standard alcohol concentration solution _____ AC, into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach $34^{\circ}\text{C} \pm 0.2^{\circ}\text{C}$
2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
4. Air blank completed.
5. Calibration check completed. Test results 0. 097 AC.
6. Air blank completed.
7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE  263

INTOXILYZER 8000
Location: MAIN JAIL
Serial Number: 80-003356
Core Version: 8105.48
08/23/2017 17:54:49

Standard Lot#: 22315100A1
Last Changed By: J. SONDRON #187

QAS: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Operator: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Test	g/210L	Time
Air Blank	0.000	17:55:30
0.100 Cal Check	0.097	17:55:51
Air Blank	0.000	17:56:20

Preventative Maintenance
Performed -- Timer Reset

EXHIBIT G-4
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY
STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 8000

STANDARD QUALITY ASSURANCE PROCEDURE

QA SPECIALIST LOUIS H. PLUNKETT JR AGENCY WACPD

DATE 09/23/17 TIME 1758

INTOXILYZER SERIAL # 80-003356 LOCATION WACPD JAIL

1. Display Reads "PUSH BUTTON TO START"

DIAGNOSTIC TESTS

1. Clock time check.

2. Date check.

OPERATIONAL TESTS

1. Alcohol-free subject test result 0. 000 AC.

2. Error recognition logic system functioning.

Not a Successfully Completed Test Sequence printed

3. Proper sample recognition system.


Not a Successfully Completed Test Sequence printed

Deficient sample printed.

4. Standard Calibration Check standard 0. 100 AC. Result 0. 097 AC

Instrument is operating properly and accurately. YES NO

COMMENTS

SIGNATURE  253

LP3
253
08/23/17

INTOXILYZER 8000
Location: MAIN JAIL
Serial Number: 80-003356
Core Version: 8105.48
08/23/2017 17:58:15

Standard Lot#: 22315100A1
Last Changed By: J. SONDROL #187

QAS: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Operator: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Subject: SQAP,TEST
DOB: 01/01/2000
Sex: M Weight: 20

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	0.000	17:59:37
Diagnostic Test	Pass	18:00:12
Air Blank	0.000	18:00:40
0.100 Cal Check	0.097	18:01:01
Air Blank	0.000	18:01:30
Subject Test	0.000	18:01:51
Air Blank	ABT*	18:01:57
Air Blank	IPS**	18:02:05

*Sequence Aborted

**Improper Sample

Not a Successfully Completed Test Sequence

INTOXILYZER 8000
 Location: MAIN JAIL
 Serial Number: 80-003356
 Core Version: 8105.48
 08/23/2017 18:07:19

Standard Lot#: 22315100A1
 Last Changed By: J. SONDROL #187

QAS: L. PLUNKETT III #253
 LAKE HAVASU CITY PD

Operator: L. PLUNKETT III #253
 LAKE HAVASU CITY PD

Subject: SQAP,TEST
 DOB: 01/01/2001
 Sex: M Weight: 111

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	0.000	18:08:24
Diagnostic Test	Pass	18:08:59
Air Blank	0.000	18:09:26
0.100 Cal Check	0.097	18:09:47
Air Blank	0.000	18:10:17
Subject Test	0.034*	18:13:24
Air Blank	0.000	18:13:56
Air Blank	0.000	18:14:23
Subject Test	*****	18:14:44
Air Blank	RFI***	18:14:53

*Deficient Sample
 **Invalid Sample
 Begin new deprivation period
 ***pre-test

Not a Successfully Completed Test Sequence

EXHIBIT G-2
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY
STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 8000
STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST LOUIS H PERKETT III AGENCY LHCPO

DATE 08/23/17 TIME 1816

INTOXILYZER SERIAL # 80-003356 LOCATION LHCPO JAIL

1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution 100 AC.
OR
Pour a standard alcohol concentration solution _____ AC, into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach $34^{\circ}\text{C} \pm 0.2^{\circ}\text{C}$
2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
4. Air blank completed.
5. Calibration check completed. Test results 0. 097 AC.
6. Air blank completed.
7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE  253

INTOXILYZER 8000
Location: MAIN JAIL
Serial Number: 80-003356
Core Version: 8105.48
08/23/2017 18:16:28

Standard Lot#: 22315100A1
Last Changed By: J. SONDRON #187

QAS: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Operator: L. PLUNKETT III #253
LAKE HAVASU CITY PD

Test	g/210L	Time
Air Blank	0.000	18:17:01
0.100 Cal Check	0.097	18:17:22
Air Blank	0.000	18:17:51

Preventative Maintenance
Performed - Timer reset